

NEXO II

serija

A
+++


Energetska
klasa

R32

Freon



WiFi
(uključen)

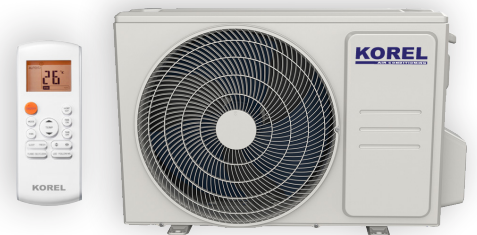

Detekcija
curenja plina



Swing
funkcija



Hitna
funkcija



Auto
restart



Niska temp.
hlađenja



Super gusti
filter



Karbonski
filter



Memorija
položaja klapne



Odvod
kondenzata
na 2 strane



1W
Standby



Noćni način
rada



Timer






Žičani upravljač
(opcija)



Ionizator



Skriveni LED
display

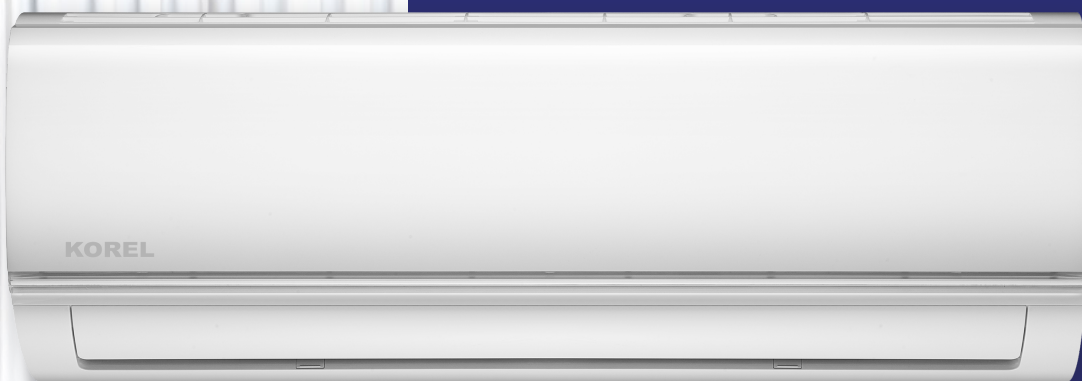

UNUTARNJA JEDINICA	KOR32-09HFN8-IX	KOR32-12HFN8-IX	KOR32-18HFN8-IX	KOR32-24HFN8-IX
VANJSKA JEDINICA	KOR32-09HFN8-OX	KOR32-12HFN8-OX	KOR32-18HFN8-OX	KOR32-24HFN8-OX
Napajanje (ph-V-Hz)	220-240V,1Ph,50Hz	220-240V,1Ph,50Hz	220-240V,1Ph,50Hz	220-240V,1Ph,50Hz
Kapacitet hlađenja (kW)	2,64	3,52	5,27	7,00
Priključak el. energije hlađenje (W)	732(100-1240)	1213(130-1580)	1550(560-2050)	2600(420-3150)
Kapacitet grijanja (kW)	2,93	3,81	5,60	7,30
Priključak el. energije grijanje (W)	733(120-1200)	1088(100-1680)	1570(780-2000)	2400(300-2750)
SEER (W)	6,3	6,1	7,4	6,1
Energetska klasa (h)	A++	A++	A++	A++
SCOP(W)	4,0	4,0	4,0	4,0
Energetska klasa (g)	A+	A+	A+	A+
Protok zraka unutarnje jedinice (m3/h)	466/360/325	540/430/314	840/680/540	980/817/662
Razina zvučnog tlaka unutarnje j. (H/M/L) (dB(A))	38.5/32/25	40.5/34.5/25	42.5/36/26	45/40.5/36
Razina zvučne snage unutarnje j. (dB(A))	54,0	55,0	56	59
Dimenzije unutarnje jedinice - ŠxVxD (mm)	805x285x194	805x285x194	957x302x213	1040x327x220
Težina unutarnje jedinice (kg)	7,6/9,7	7,6/9,8	10/13	12,3/15,8
Razina zvučnog tlaka vanjske jedinice (dB(A))	55,5	56,0	56	59
Razina zvučne snage vanjske jedinice (dB(A))	62,0	63,0	63	67
Dimenzije vanjske jedinice - ŠxVxD (mm)	720x495x270	720x495x270	805x554x330	890x673x342
Težina vanjske jedinice (kg)	23,2/25,0	23,2/25,0	32,7/35,4	42,9/45,9
Rashladno sredstvo	R32	R32	R32	R32
Promjer cijevi tekuća/plinska faza (inch(mm))	6.35mm(1/4in)/9.52mm(3/8in)	6.35mm(1/4in)/9.52mm(3/8in)	6.35mm(1/4in)/12.7mm(1/2in)	9.52mm(3/8in)/15.9mm(5/8in)
Max duljina cjevovoda (m)	25	25	30	50
Max visinska razlika (m)	10	10	20	25
Područje rada hlađenje/grijanje (°C) min-max	-15-50/-15-30	-15-50/-15-30	-15-50/-15-30	-15-50/-15-30
Razmak između nosača (cm)	45	45	51,4	54