


# serija FORWARD



Mono  
split

UNUTARNJA JEDINICA	KSAF-12DCE	KSAF-18DCE	KSAF-24DCE
<b>VANJSKA JEDINICA</b>	<b>KSAF-12DCE</b>	<b>KSAF-18DCE</b>	<b>KSAF-24DCE</b>
Napajanje (ph-V-Hz)	220-240V-/50Hz/1P	220-240V-/50Hz/1P	220-240V-/50Hz/1P
Kapacitet hlađenja (kW)	3.5(0.8-4.1)	5.1(1.3-5.3)	6.7(1.8-7.4)
Priključak el. energije hlađenje (W)	1180(100-1600)	1520(280-1700)	2200(230-2760)
Kapacitet grijanja (kW)	3.8(1.0-4.2)	5.4(1.3-5.5)	7.2(1.8-8.2)
Priključak el. energije grijanje (W)	1100(300-1600)	1400(220-1500)	2200(230-2530)
SEER (W)	6,19	6,6	6,53
Energetska klasa (h)	A++	A++	A++
SCOP(W)	4,03	4,10	4,09
Energetska klasa (g)	A+	A+	A+
Protok zraka unutarnje jedinice (m3/h)	600/550/500/400	850/750/670/600	1300/1150/1010/870
Razina zvučne snage unutarnje j. (H/M/L) (dB(A))	53/62	57/62	63/66
Dimenzije unutarnje jedinice - ŠxVxD (mm)	750*285*200	900*310*225	1082*330*233
Težina unutarnje jedinice (kg)	8,5	11	14
Razina zvučne snage vanjske jedinice (dB(A))	53/62	57/62	63/66
Dimenzije vanjske jedinice - ŠxVxD (mm)	705*279*530	715*280*537	900*700*350
Težina vanjske jedinice (kg)	22,5	25	39
Rashladno sredstvo	R32	R32	R32
Promjer cijevi tekuća/plinska faza (inch(mm))	6.35mm(1/4in)/9.52mm (3/8in)	6.35mm(1/4in)/12.7mm (1/2in)	6.35mm(1/4in)/15.9mm (5/8in)
Max duljina cjevovoda (m)	20	25	25
Max visinska razlika (m)	10	15	15
Područje rada hlađenje/grijanje (°C) min-max	16-49/-15-30	16-49/-15-30	16-49/-15-30
Razmak između nosača (cm)	54	54	63

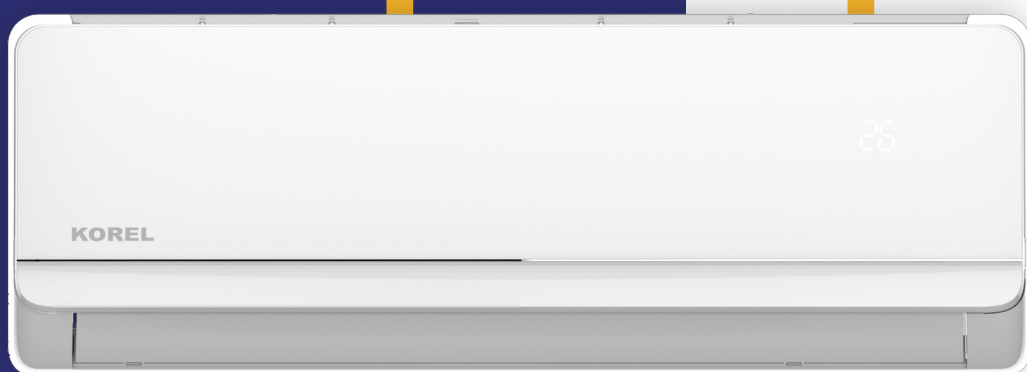



Samodijagnostika i automatska zaštita



Auto restart



Samočišćenje



Skriveni LED display



Turbo način rada



Timer



IFeel / Slijedi me funkcija

A  
++

Energetska klasa



WiFi (priprema)

R32

Freon

